
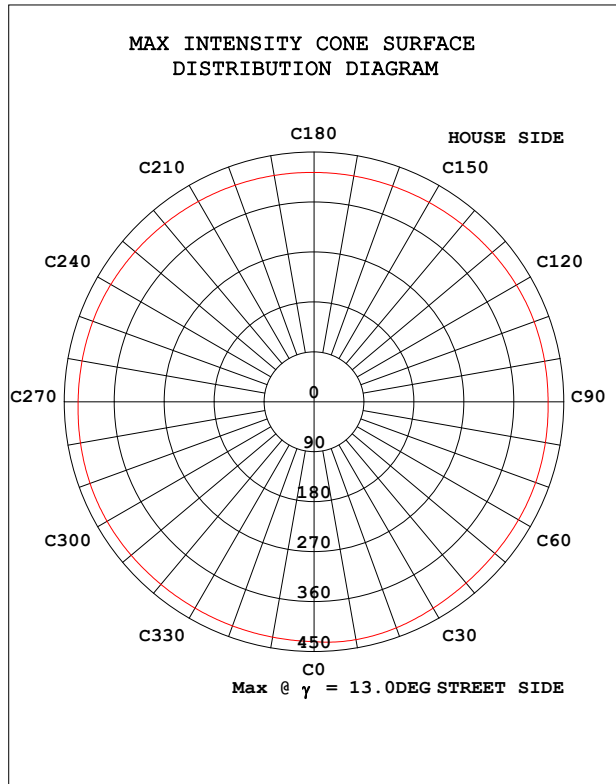


STREETLIGHT PHOTOMETRIC TEST REPORT

| | | |
|--|----------|---------------------|
| Test:U:0V I:0A P:0W PF:0 Freq:0Hz Lamp Flux:5035.77x1 lm | | |
| NAME: | TYPE:LED | WEIGHT:N/A |
| SPEC.:N/A | DIM.: | SERIAL No.:N/A |
| MFR.: | SUR.: | Shielding Angle:N/A |

| DATA OF LAMP | | PHOTOMETRIC DATA | | | |
|------------------|---------|--------------------------|---------|-----------------------|---------|
| MODEL | SLL-16 | Imax(cd/klm) | 432.5 | η street_up(%) | 0.5 |
| NOMINAL POWER(W) | | LOR(%) | 100.0 | η street_down(%) | 56.9 |
| RATED VOLTAGE(V) | | TOTAL FLUX(lm/klm) | 1000 | η house_up(%) | 0.3 |
| NOMINAL FLUX(lm) | 5035.77 | MAXIMUM @ (C, γ) | 23,13.0 | η house_down(%) | 42.3 |
| LAMPS INSIDE | 1 | η up(%) | 0.8 | 76 FLASHAREA(m2) | 0.00100 |
| TEST VOLTAGE(V) | | η down(%) | 99.2 | SLI | 17.954 |

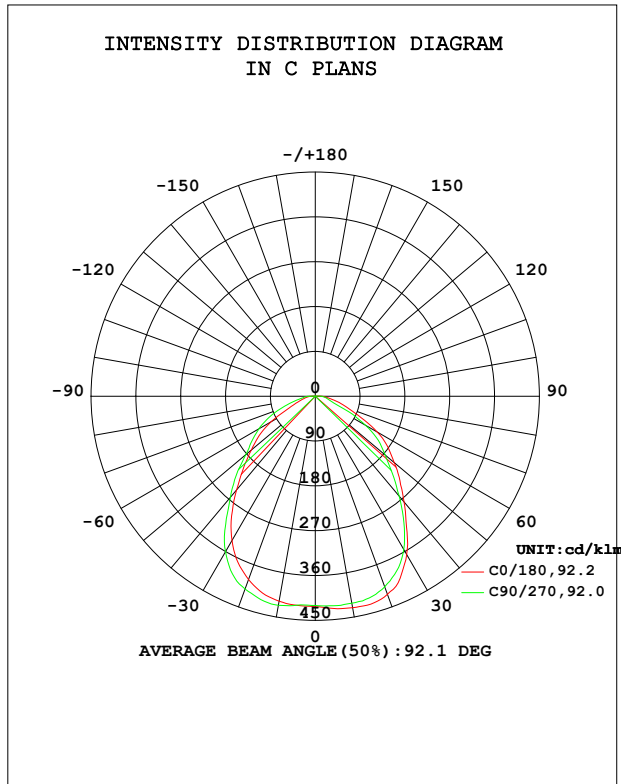


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:Kai
 Test Date:2017-05-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4966]
 Remarks:

STREETLIGHT ISOCANDELA DIAGRAM

| | | |
|--|----------|---------------------|
| Test:U:0V I:0A P:0W PF:0 Freq:0Hz Lamp Flux:5035.77x1 lm | | |
| NAME: | TYPE:LED | WEIGHT:N/A |
| SPEC.:N/A | DIM.: | SERIAL No.:N/A |
| MFR.: | SUR.: | Shielding Angle:N/A |

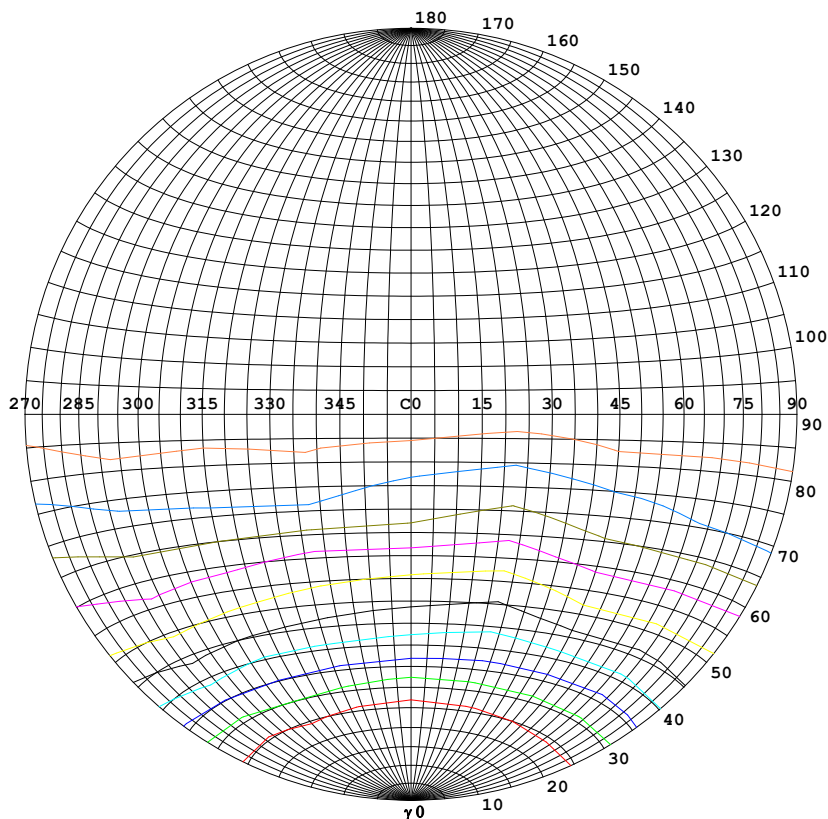

Classification:



IES:Type VS - Very Short
 CIE:Narrow - Short
 IES:Cut-off
 CIE:Semi-cut-off
 Max.At80:41.44cd/klm
 Max.At90:13.47cd/klm
 Max.80-90:41.44cd/klm

| ISOCANDELA DIAGRAM | |
|--------------------|--------|
| UNIT | cd/klm |
| Imax=100% | 433 |
| — 90% | 389 |
| — 80% | 346 |
| — 70% | 303 |
| — 60% | 260 |
| — 50% | 216 |
| — 40% | 173 |
| — 30% | 130 |
| — 20% | 87 |
| — 10% | 43 |
| — 5% | 22 |

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:Kai
 Test Date:2017-05-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4966]
 Remarks:

COEFFICIENT OF UTILIZATION CURVE AND ISOLUX DIAGRAM

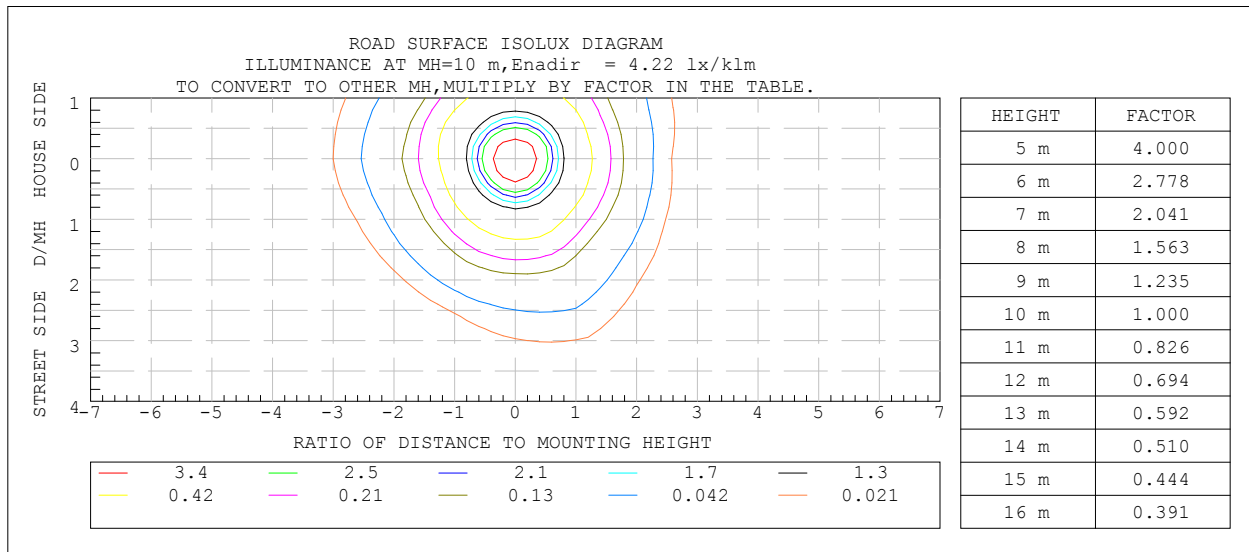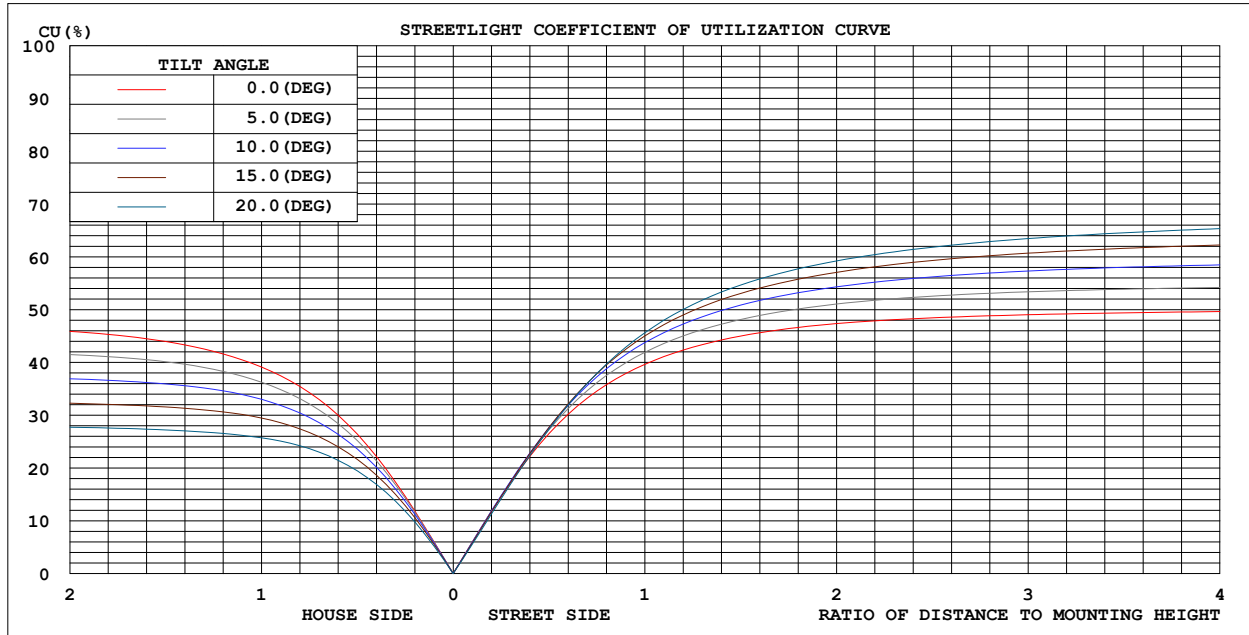

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.5DEG
 Operators: Kai
 Test Date: 2017-05-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity: 65.7%
 Test Distance: 26.000m [K=1.4966]
 Remarks:

ZONAL FLUX DIAGRAM

| | | |
|--|----------|---------------------|
| Test:U:0V I:0A P:0W PF:0 Freq:0Hz Lamp Flux:5035.77x1 lm | | |
| NAME: | TYPE:LED | WEIGHT:N/A |
| SPEC.:N/A | DIM.: | SERIAL No.:N/A |
| MFR.: Shenzhen Sresky Co.,Ltd | SUR.: | Shielding Angle:N/A |


| γ | C0 | C45 | C90 | C135 | C180 | C225 | C270 | C315 | γ | Φ zone | Φ total | %lum,lamp |
|-----|---------------------------|--------|--------|--------|--------|--------|--------|--------|---------|-------------|---------|-----------|
| 10 | 431.2 | 425.4 | 422.0 | 422.3 | 417.9 | 420.4 | 426.2 | 430.5 | 0- 10 | 40.45 | 40.45 | 4.04,4.05 |
| 20 | 423.3 | 414.4 | 407.4 | 403.6 | 391.7 | 403.3 | 411.8 | 414.7 | 10- 20 | 118.7 | 159.1 | 15.9,15.9 |
| 30 | 367.2 | 355.7 | 355.3 | 354.4 | 334.5 | 349.8 | 360.3 | 346.2 | 20- 30 | 177.5 | 336.6 | 33.7,33.7 |
| 40 | 277.4 | 274.3 | 262.3 | 265.8 | 245.8 | 261.8 | 265.5 | 264.1 | 30- 40 | 193.0 | 529.6 | 53,53 |
| 50 | 206.9 | 188.2 | 183.1 | 198.0 | 167.5 | 191.0 | 182.1 | 181.2 | 40- 50 | 173.2 | 702.8 | 70.3,70.3 |
| 60 | 143.7 | 121.3 | 116.3 | 131.4 | 102.0 | 112.0 | 130.1 | 121.4 | 50- 60 | 139.6 | 842.4 | 84.2,84.2 |
| 70 | 70.13 | 62.60 | 38.71 | 78.34 | 41.89 | 42.82 | 75.44 | 49.25 | 60- 70 | 86.91 | 929.3 | 92.9,92.9 |
| 80 | 32.50 | 26.61 | 23.14 | 29.93 | 21.25 | 21.42 | 31.19 | 25.80 | 70- 80 | 42.74 | 972.0 | 97.2,97.2 |
| 90 | 13.42 | 13.47 | 11.88 | 6.299 | 10.17 | 9.560 | 12.30 | 13.46 | 80- 90 | 20.19 | 992.2 | 99.2,99.2 |
| 100 | 2.287 | 2.808 | 3.185 | 0.9637 | 1.630 | 1.576 | 1.445 | 3.891 | 90-100 | 6.388 | 998.6 | 99.9,99.9 |
| 110 | 0.1217 | 0.1040 | 0.1158 | 0.1222 | 0.1912 | 0.1907 | 0.3539 | 0.2095 | 100-110 | 0.7500 | 999.3 | 99.9,99.9 |
| 120 | 0.1217 | 0.1040 | 0.1040 | 0.1222 | 0.1912 | 0.1907 | 0.2681 | 0.2095 | 110-120 | 0.1810 | 999.5 | 99.9,100 |
| 130 | 0.1217 | 0.1040 | 0.1040 | 0.1222 | 0.1912 | 0.1907 | 0.2155 | 0.2095 | 120-130 | 0.1439 | 999.7 | 100,100 |
| 140 | 0.1217 | 0.1040 | 0.1040 | 0.1222 | 0.1912 | 0.1907 | 0.2402 | 0.2095 | 130-140 | 0.1212 | 999.8 | 100,100 |
| 150 | 0.1217 | 0.1040 | 0.1040 | 0.1222 | 0.2607 | 0.2436 | 0.2606 | 0.2449 | 140-150 | 0.1023 | 999.9 | 100,100 |
| 160 | 0.1217 | 0.1040 | 0.2072 | 0.1737 | 0.3208 | 0.2661 | 0.2803 | 0.2963 | 150-160 | 0.0942 | 1000.0 | 100,100 |
| 170 | 0.2257 | 0.2941 | 0.2770 | 0.3140 | 0.3429 | 0.2727 | 0.2999 | 0.3074 | 160-170 | 0.0689 | 1000 | 100,100 |
| 180 | 0.2607 | 0.2947 | 0.2774 | 0.2968 | 0.3476 | 0.2774 | 0.2774 | 0.2793 | 170-180 | 0.0273 | 1000 | 100,100 |
| DEG | LUMINOUS INTENSITY:cd/klm | | | | | | | | | UNIT:lm/klm | | |

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:Kai
 Test Date:2017-05-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4966]
 Remarks:

ISOCANDELA DIAGRAM


| | | |
|--|----------|---------------------|
| Test:U:0V I:0A P:0W PF:0 Freq:0Hz Lamp Flux:5035.77x1 lm | | |
| NAME: | TYPE:LED | WEIGHT:N/A |
| SPEC.:N/A | DIM.: | SERIAL No.:N/A |
| MFR.: | SUR.: | Shielding Angle:N/A |

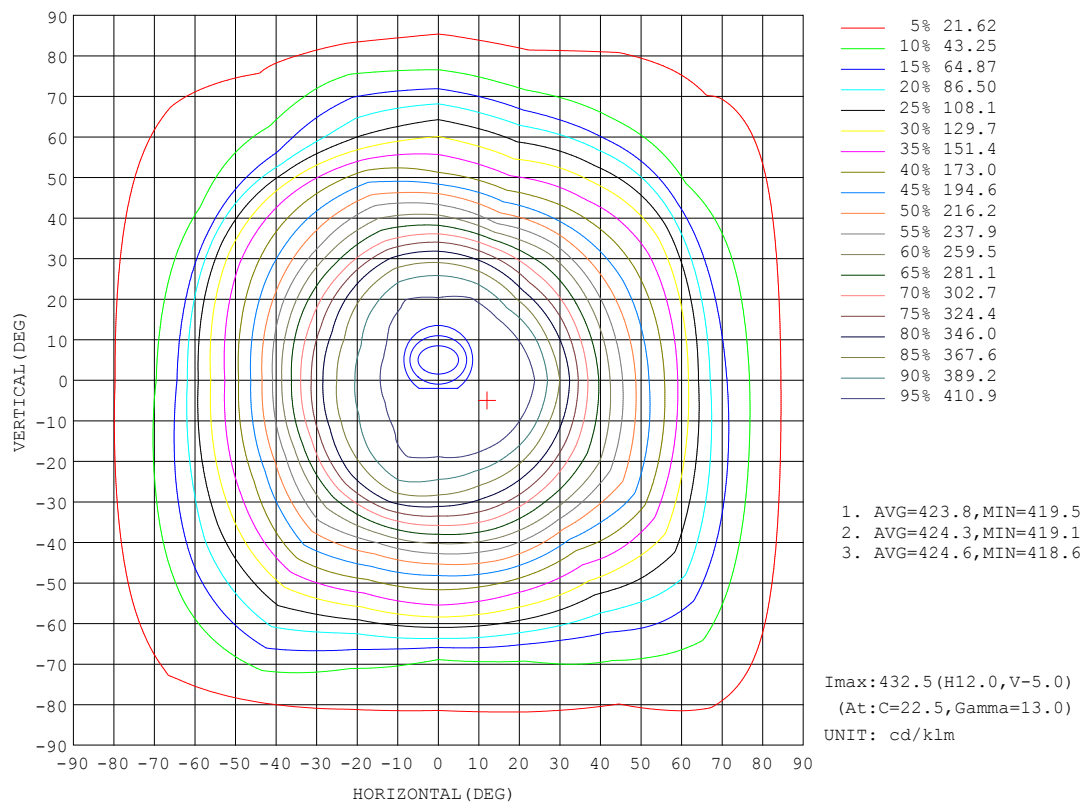

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.5DEG
Operators:Kai
Test Date:2017-05-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
Humidity:65.7%
Test Distance:26.000m [K=1.4966]
Remarks:

Planar Illuminance Curve

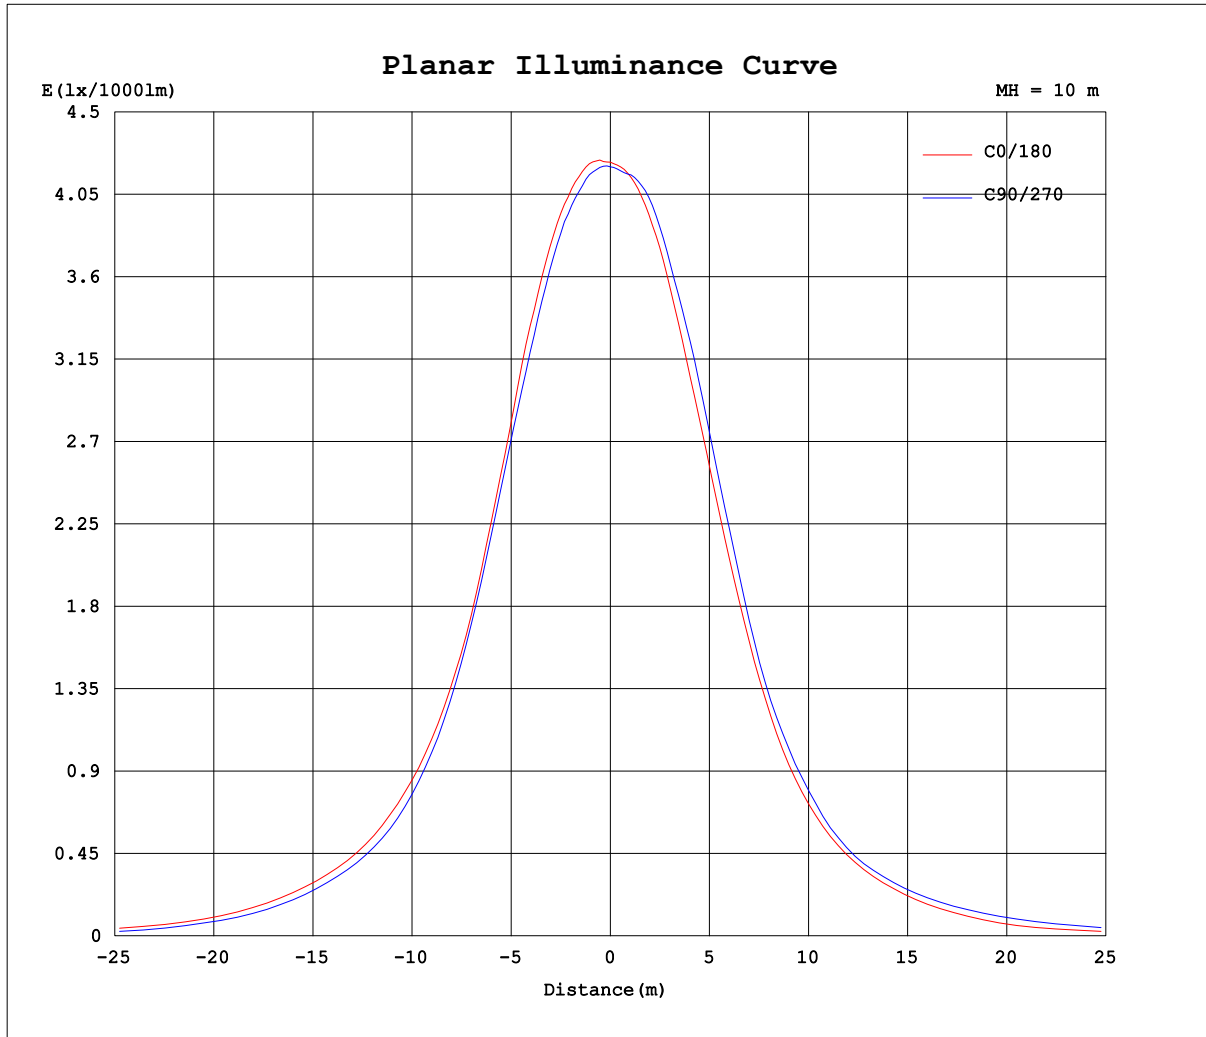


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 24.5DEG
Operators: Kai
Test Date: 2017-05-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.352
Humidity: 65.7%
Test Distance: 26.000m [K=1.4966]
Remarks:

LCS REPORT

| | | |
|--|----------|---------------------|
| Test:U:0V I:0A P:0W PF:0 Freq:0Hz Lamp Flux:5035.77x1 lm | | |
| NAME: | TYPE:LED | WEIGHT:N/A |
| SPEC.:N/A | DIM.: | SERIAL No.:N/A |
| MFR.: | SUR.: | Shielding Angle:N/A |

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

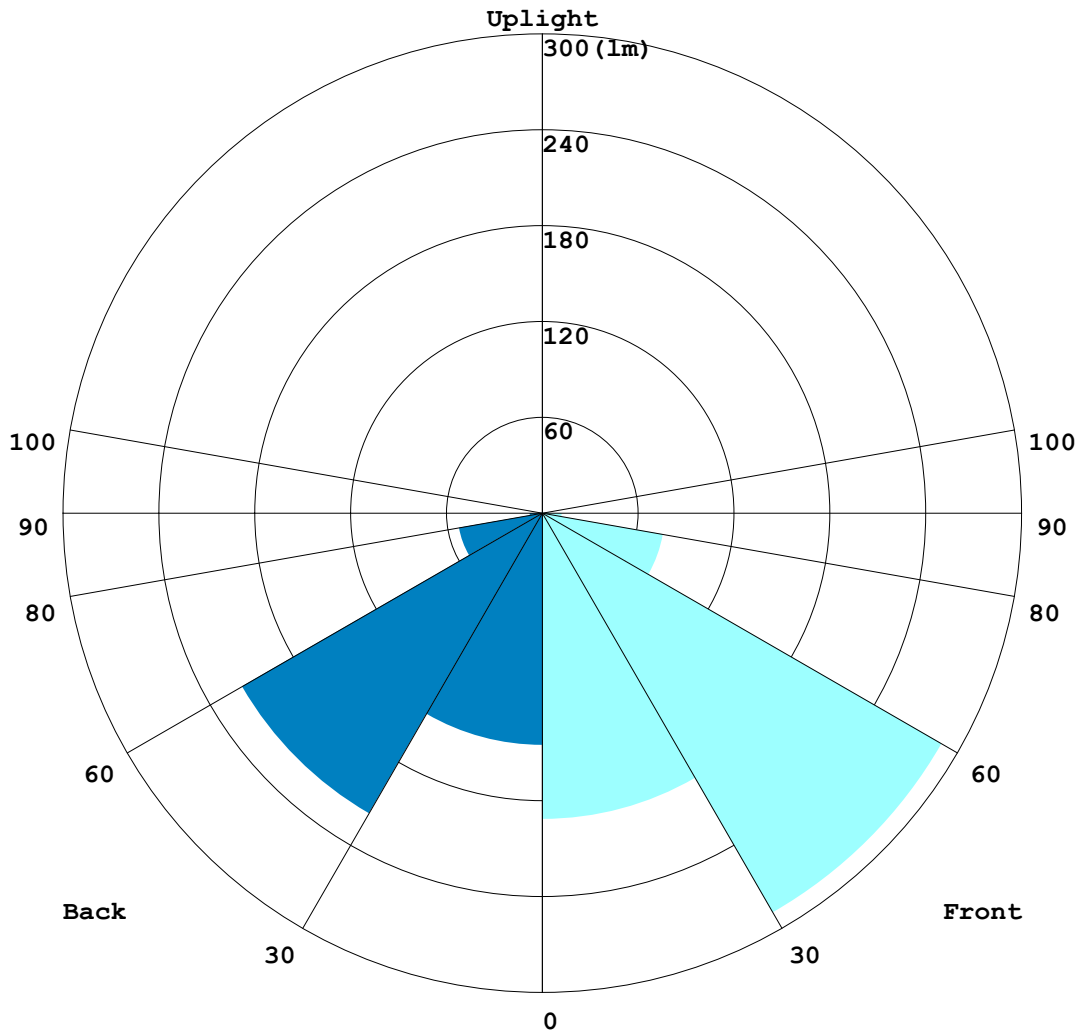

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:Kai
 Test Date:2017-05-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4966]
 Remarks:

BUG REPORT

| | | |
|--|----------|---------------------|
| Test:U:0V I:0A P:0W PF:0 Freq:0Hz Lamp Flux:5035.77x1 lm | | |
| NAME: | TYPE:LED | WEIGHT:N/A |
| SPEC.:N/A | DIM.: | SERIAL No.:N/A |
| MFR.: | SUR.: | Shielding Angle:N/A |

IESNA Luminaire Flux Distribution Table:

| Zone | Lumens | Luminaire % |
|------------------------------|---------------|-------------|
| FL - Front-Low(0-30) | 191.47 | 19.1 |
| FM - Front-Medium(30-60) | 288.73 | 28.9 |
| FH - Front-High(60-80) | 76.753 | 7.7 |
| FVH - Front-Very High(80-90) | 12.252 | 1.2 |
| Total Forward Light | 574.44 | 57.4 |

| | | |
|-----------------------------|---------------|-------------|
| BL - Back-Low(0-30) | 145.14 | 14.5 |
| BM - Back-Medium(30-60) | 217.02 | 21.7 |
| BH - Back-High(60-80) | 52.898 | 5.3 |
| BVH - Back-Very High(80-90) | 7.9416 | 0.8 |
| Total Back Light | 425.65 | 42.6 |

| | | |
|----------------------------|---------------|------------|
| UL - Uplight-Low(90-100) | 6.3876 | 0.6 |
| UH - Uplight-High(100-180) | 1.4887 | 0.1 |
| Total Up Light | 7.8763 | 0.8 |

| | |
|---------------------------|----------|
| BUG(Back,Up,Glare) Rating | B1-U1-G1 |
|---------------------------|----------|

| Zone | Downward Lumens | Upward Lumens | Total Lumens |
|-------------|--------------------|------------------|-----------------|
| House Side | 423.01 | 2.6397 | 425.65 |
| Street Side | 569.2 | 5.2366 | 574.44 |


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:Kai
 Test Date:2017-05-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4966]
 Remarks:

ROAD ISOCANDELA REPORT

| | | |
|--|----------|---------------------|
| Test:U:0V I:0A P:0W PF:0 Freq:0Hz Lamp Flux:5035.77x1 lm | | |
| NAME: | TYPE:LED | WEIGHT:N/A |
| SPEC.:N/A | DIM.: | SERIAL No.:N/A |
| MFR.: | SUR.: | Shielding Angle:N/A |

ROAD SURFACE ISOCANDELA DIAGRAM

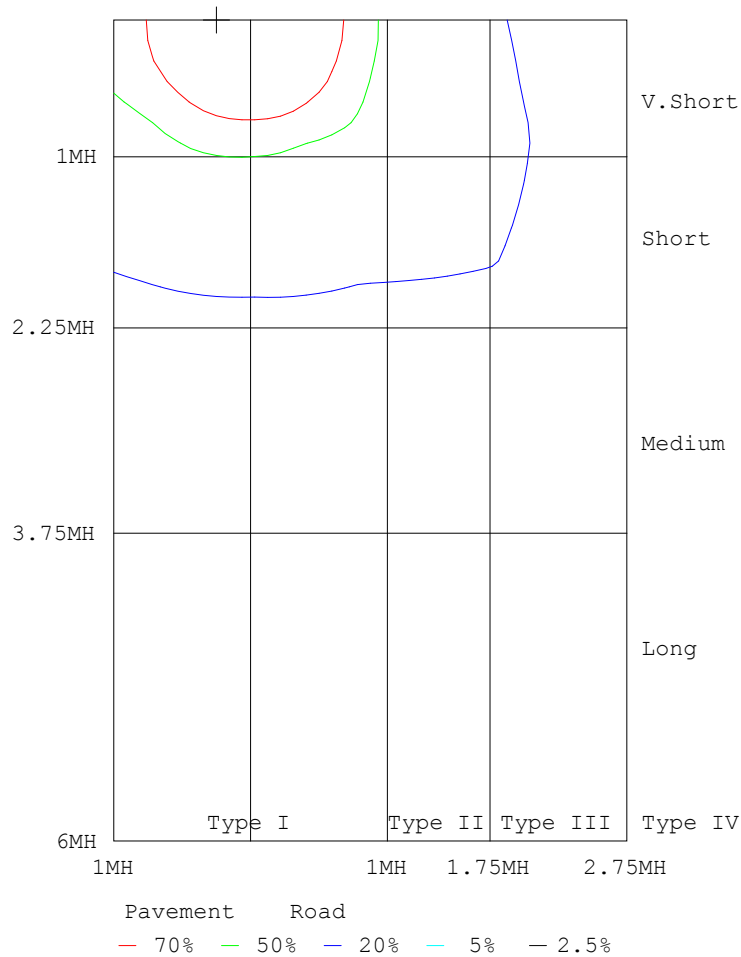

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:Kai
 Test Date:2017-05-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4966]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

| | | |
|--|----------|---------------------|
| Test:U:0V I:0A P:0W PF:0 Freq:0Hz Lamp Flux:5035.77x1 lm | | |
| NAME: | TYPE:LED | WEIGHT:N/A |
| SPEC.:N/A | DIM.: | SERIAL No.:N/A |
| MFR.: | SUR.: | Shielding Angle:N/A |

Table--1

UNIT: cd/klm

| C (DEG) \ γ (DEG) | 0 | 22.5 | 45 | 67.5 | 90 | 112.5 | 135 | 157.5 | 180 | 202.5 | 225 | 247.5 | 270 | 292.5 | 315 | 337.5 | | | |
|-------------------|------|------|------|------|------|-------|------|-------|------|-------|------|-------|------|-------|------|-------|--|--|--|
| 0 | 423 | 422 | 421 | 421 | 420 | 420 | 419 | 419 | 423 | 422 | 421 | 421 | 420 | 420 | 419 | 419 | | | |
| 5 | 428 | 426 | 422 | 425 | 422 | 422 | 420 | 419 | 421 | 423 | 420 | 424 | 421 | 426 | 425 | 423 | | | |
| 10 | 431 | 431 | 425 | 427 | 422 | 423 | 422 | 418 | 418 | 420 | 420 | 426 | 426 | 431 | 431 | 429 | | | |
| 15 | 432 | 431 | 425 | 423 | 419 | 419 | 413 | 409 | 409 | 410 | 414 | 421 | 423 | 425 | 428 | 429 | | | |
| 20 | 423 | 420 | 414 | 411 | 407 | 412 | 404 | 395 | 392 | 394 | 403 | 413 | 412 | 415 | 415 | 419 | | | |
| 25 | 403 | 398 | 389 | 384 | 387 | 396 | 386 | 374 | 368 | 369 | 382 | 395 | 394 | 393 | 385 | 396 | | | |
| 30 | 367 | 359 | 356 | 353 | 355 | 364 | 354 | 340 | 335 | 336 | 350 | 364 | 360 | 354 | 346 | 355 | | | |
| 35 | 320 | 321 | 316 | 315 | 310 | 314 | 312 | 295 | 293 | 296 | 304 | 318 | 314 | 304 | 304 | 312 | | | |
| 40 | 277 | 283 | 274 | 270 | 262 | 261 | 266 | 249 | 246 | 255 | 262 | 275 | 265 | 246 | 264 | 269 | | | |
| 45 | 241 | 251 | 230 | 228 | 219 | 217 | 232 | 210 | 204 | 213 | 224 | 240 | 225 | 204 | 220 | 230 | | | |
| 50 | 207 | 219 | 188 | 186 | 183 | 182 | 198 | 176 | 168 | 179 | 191 | 201 | 182 | 167 | 181 | 197 | | | |
| 55 | 178 | 189 | 153 | 151 | 155 | 149 | 164 | 147 | 137 | 151 | 157 | 164 | 155 | 137 | 150 | 168 | | | |
| 60 | 144 | 153 | 121 | 118 | 116 | 116 | 131 | 118 | 102 | 111 | 112 | 122 | 130 | 112 | 121 | 139 | | | |
| 65 | 102 | 121 | 90.4 | 79.8 | 74.9 | 82.0 | 104 | 89.7 | 61.7 | 53.7 | 63.1 | 91.7 | 104 | 84.2 | 86.4 | 98.6 | | | |
| 70 | 70.1 | 92.9 | 62.6 | 45.9 | 38.7 | 54.6 | 78.3 | 63.8 | 41.9 | 37.7 | 42.8 | 70.0 | 75.4 | 56.1 | 49.2 | 49.8 | | | |
| 75 | 50.2 | 63.0 | 42.9 | 33.3 | 28.8 | 34.2 | 52.0 | 41.5 | 28.9 | 28.7 | 28.5 | 49.7 | 50.0 | 35.5 | 33.2 | 31.4 | | | |
| 80 | 32.5 | 41.4 | 26.6 | 24.5 | 23.1 | 24.3 | 29.9 | 26.6 | 21.2 | 22.6 | 21.4 | 29.9 | 31.2 | 24.6 | 25.8 | 23.8 | | | |
| 85 | 20.4 | 25.3 | 18.5 | 18.1 | 17.1 | 16.8 | 13.8 | 19.7 | 15.0 | 16.2 | 14.9 | 19.0 | 22.2 | 17.7 | 19.3 | 18.4 | | | |
| 90 | 13.4 | 12.4 | 13.5 | 12.4 | 11.9 | 11.3 | 6.30 | 9.01 | 10.2 | 10.7 | 9.56 | 7.33 | 12.3 | 12.2 | 13.5 | 12.6 | | | |
| 95 | 4.84 | 4.83 | 7.17 | 7.42 | 6.55 | 4.25 | 3.29 | 2.62 | 4.86 | 5.52 | 4.35 | 3.14 | 4.51 | 6.89 | 7.97 | 7.59 | | | |
| 100 | 2.29 | 1.93 | 2.81 | 3.55 | 3.18 | 2.20 | 0.96 | 1.01 | 1.63 | 2.31 | 1.58 | 0.99 | 1.44 | 2.81 | 3.89 | 3.42 | | | |
| 105 | 0.33 | 0.26 | 0.57 | 0.09 | 0.16 | 0.10 | 0.12 | 0.14 | 0.23 | 0.23 | 0.19 | 0.12 | 0.40 | 0.89 | 1.10 | 0.94 | | | |
| 110 | 0.12 | 0.14 | 0.10 | 0.09 | 0.12 | 0.07 | 0.12 | 0.12 | 0.19 | 0.21 | 0.19 | 0.13 | 0.35 | 0.74 | 0.21 | 0.21 | | | |
| 115 | 0.12 | 0.14 | 0.10 | 0.09 | 0.10 | 0.07 | 0.12 | 0.12 | 0.19 | 0.21 | 0.19 | 0.13 | 0.31 | 0.59 | 0.21 | 0.21 | | | |
| 120 | 0.12 | 0.14 | 0.10 | 0.09 | 0.10 | 0.07 | 0.12 | 0.12 | 0.19 | 0.21 | 0.19 | 0.14 | 0.27 | 0.44 | 0.21 | 0.21 | | | |
| 125 | 0.12 | 0.14 | 0.10 | 0.09 | 0.10 | 0.07 | 0.12 | 0.12 | 0.19 | 0.21 | 0.19 | 0.14 | 0.23 | 0.29 | 0.21 | 0.21 | | | |
| 130 | 0.12 | 0.14 | 0.10 | 0.09 | 0.10 | 0.07 | 0.12 | 0.12 | 0.19 | 0.21 | 0.19 | 0.17 | 0.22 | 0.23 | 0.21 | 0.21 | | | |
| 135 | 0.12 | 0.14 | 0.10 | 0.09 | 0.10 | 0.07 | 0.12 | 0.12 | 0.19 | 0.21 | 0.19 | 0.18 | 0.23 | 0.21 | 0.21 | 0.21 | | | |
| 140 | 0.12 | 0.14 | 0.10 | 0.09 | 0.10 | 0.07 | 0.12 | 0.12 | 0.19 | 0.21 | 0.19 | 0.20 | 0.24 | 0.20 | 0.21 | 0.21 | | | |
| 145 | 0.12 | 0.14 | 0.10 | 0.09 | 0.10 | 0.07 | 0.12 | 0.12 | 0.19 | 0.21 | 0.21 | 0.19 | 0.25 | 0.21 | 0.21 | 0.21 | | | |
| 150 | 0.12 | 0.14 | 0.10 | 0.09 | 0.10 | 0.09 | 0.12 | 0.12 | 0.26 | 0.25 | 0.24 | 0.27 | 0.26 | 0.26 | 0.24 | 0.23 | | | |
| 155 | 0.12 | 0.14 | 0.10 | 0.09 | 0.15 | 0.15 | 0.13 | 0.12 | 0.30 | 0.30 | 0.26 | 0.29 | 0.27 | 0.28 | 0.29 | 0.28 | | | |
| 160 | 0.12 | 0.14 | 0.10 | 0.13 | 0.21 | 0.21 | 0.17 | 0.13 | 0.32 | 0.30 | 0.27 | 0.29 | 0.28 | 0.28 | 0.30 | 0.30 | | | |
| 165 | 0.14 | 0.14 | 0.14 | 0.17 | 0.24 | 0.26 | 0.24 | 0.18 | 0.33 | 0.31 | 0.27 | 0.29 | 0.29 | 0.29 | 0.30 | 0.30 | | | |
| 170 | 0.23 | 0.21 | 0.29 | 0.25 | 0.28 | 0.27 | 0.31 | 0.24 | 0.34 | 0.31 | 0.27 | 0.29 | 0.30 | 0.29 | 0.31 | 0.30 | | | |
| 175 | 0.25 | 0.25 | 0.28 | 0.27 | 0.28 | 0.28 | 0.30 | 0.27 | 0.35 | 0.30 | 0.28 | 0.30 | 0.31 | 0.29 | 0.31 | 0.30 | | | |
| 180 | 0.26 | 0.30 | 0.29 | 0.28 | 0.28 | 0.28 | 0.30 | 0.30 | 0.35 | 0.26 | 0.28 | 0.30 | 0.28 | 0.28 | 0.28 | 0.30 | | | |


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:Kai
 Test Date:2017-05-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4966]
 Remarks:

AAI Figure

| | | |
|--|----------|---------------------|
| Test:U:0V I:0A P:0W PF:0 Freq:0Hz Lamp Flux:5035.77x1 lm | | |
| NAME: | TYPE:LED | WEIGHT:N/A |
| SPEC.:N/A | DIM.: | SERIAL No.:N/A |
| MFR.: | SUR.: | Shielding Angle:N/A |

Flux out:3294 lm

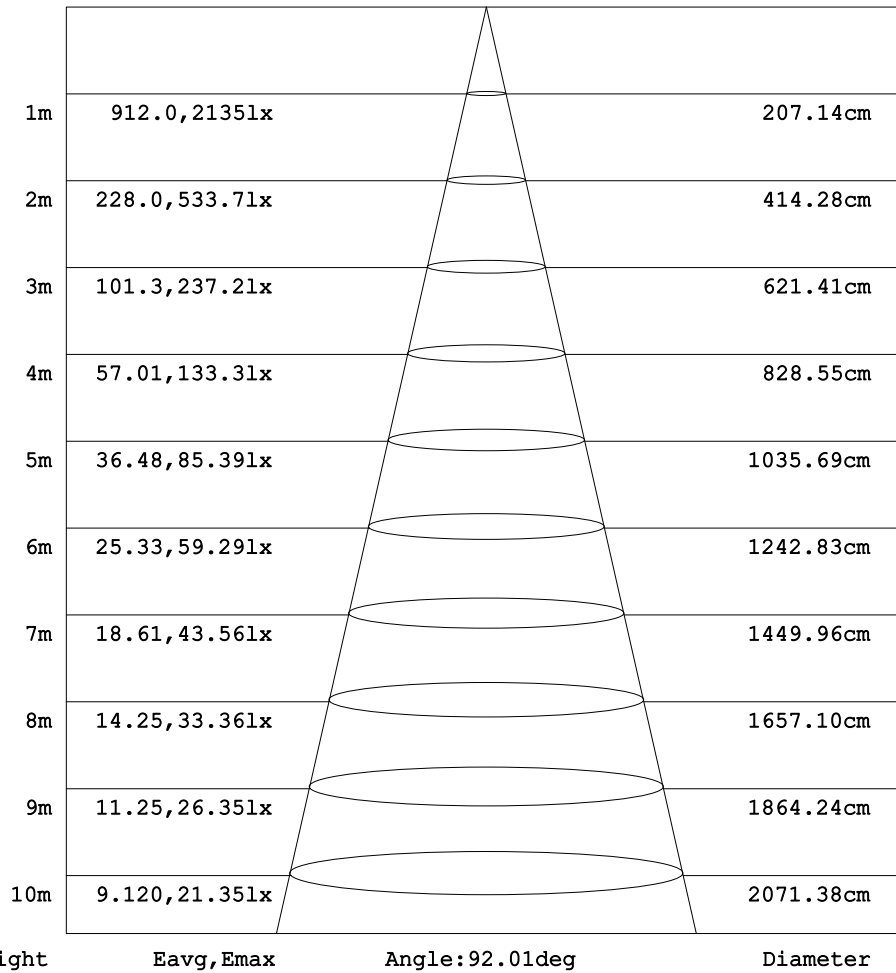

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:Kai
 Test Date:2017-05-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.4966]
 Remarks: