
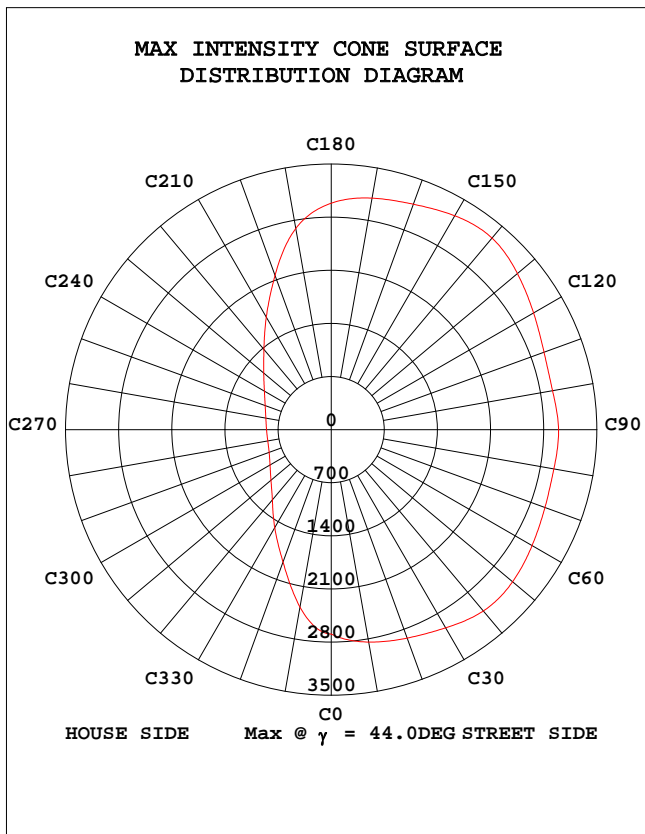


## STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:9.5177V I:6.3243A P:60.194W PF:1.0000 Freq:0Hz Lamp Flux:8175.89x1 lm		
NAME:	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.:	SUR.:	Shielding Angle:N/A

DATA OF LAMP		PHOTOMETRIC DATA Eff: 135.83 lm/W			
MODEL	60W	I <sub>max</sub> (cd)	3297	η street_up(%)	0.1
NOMINAL POWER(W)	60	LOR(%)	100.0	η street_down(%)	62.8
RATED VOLTAGE(V)	9.5	TOTAL FLUX(lm)	8176	η house_up(%)	0.1
NOMINAL FLUX(lm)	8175.89	MAXIMUM @(C,γ )	140,44.0	η house_down(%)	37.0
LAMPS INSIDE	1	η up(%)	0.2	76 FLASHAREA(m2)	0.00100
TEST VOLTAGE(V)	9.5	η down(%)	99.8	SLI	17.966

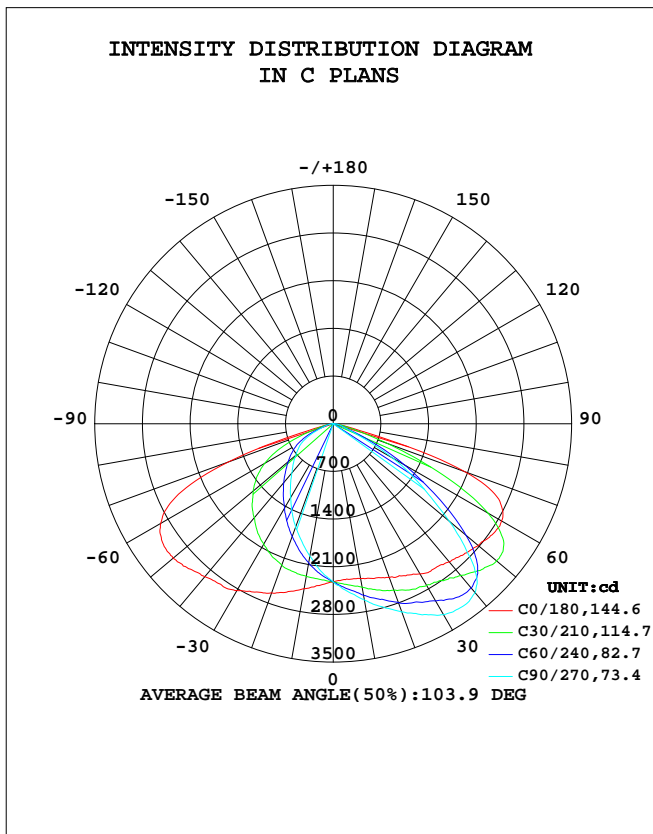


C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2018-09-06

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3825]  
 Remarks:

## STREETLIGHT ISOCANDELA DIAGRAM

Test:U:9.5177V I:6.3243A P:60.194W PF:1.0000 Freq:0Hz Lamp Flux:8175.89x1 lm		
NAME:	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.:	SUR.:	Shielding Angle:N/A

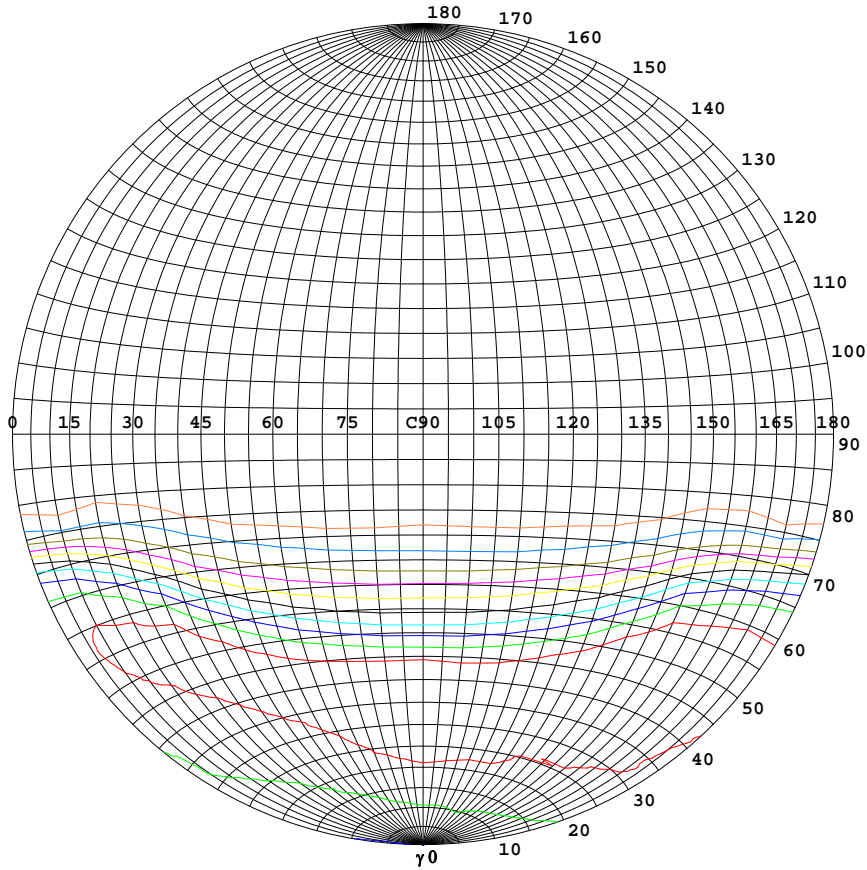

**Classification:**



IES:Type VS - Very Short  
 CIE:Narrow - Short  
 IES:Cut-off  
 CIE:Full cut-off  
 Max.At80:24.64cd/klm  
 Max.At90:0.7905cd/klm  
 Max.80-90:24.64cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
Imax=100%	3297
— 90%	2967
— 80%	2637
— 70%	2308
— 60%	1978
— 50%	1648
— 40%	1319
— 30%	989
— 20%	659
— 10%	330
— 5%	165

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2018-09-06

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3825]  
 Remarks:

## COEFFICIENT OF UTILIZATION CURVE AND ISOLUX DIAGRAM

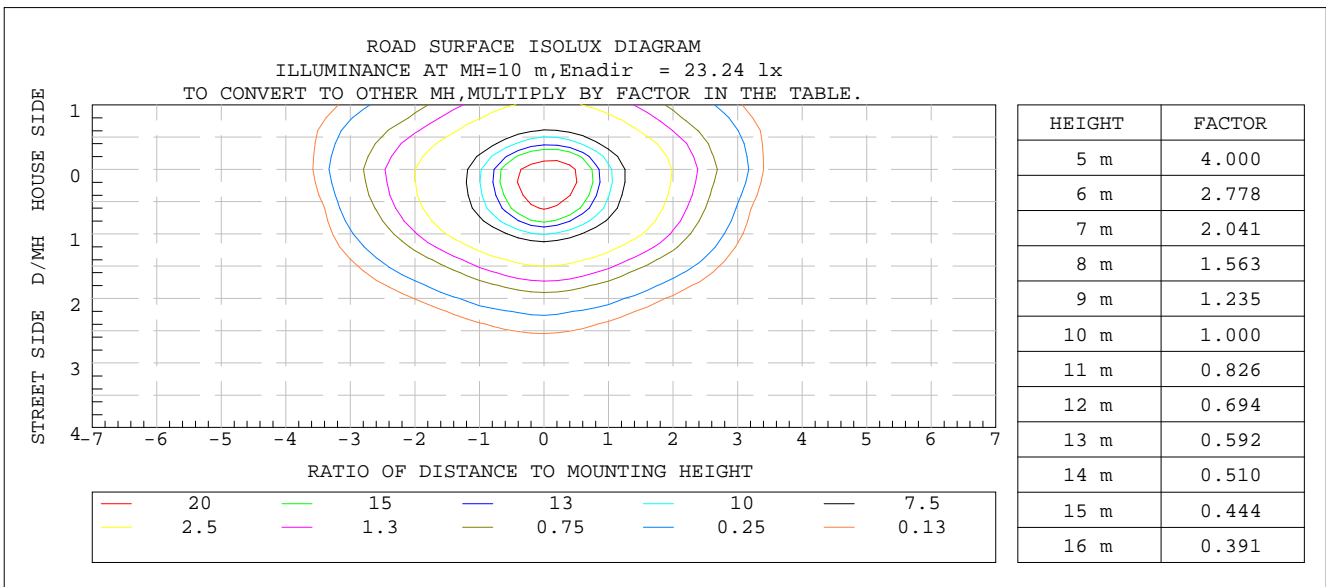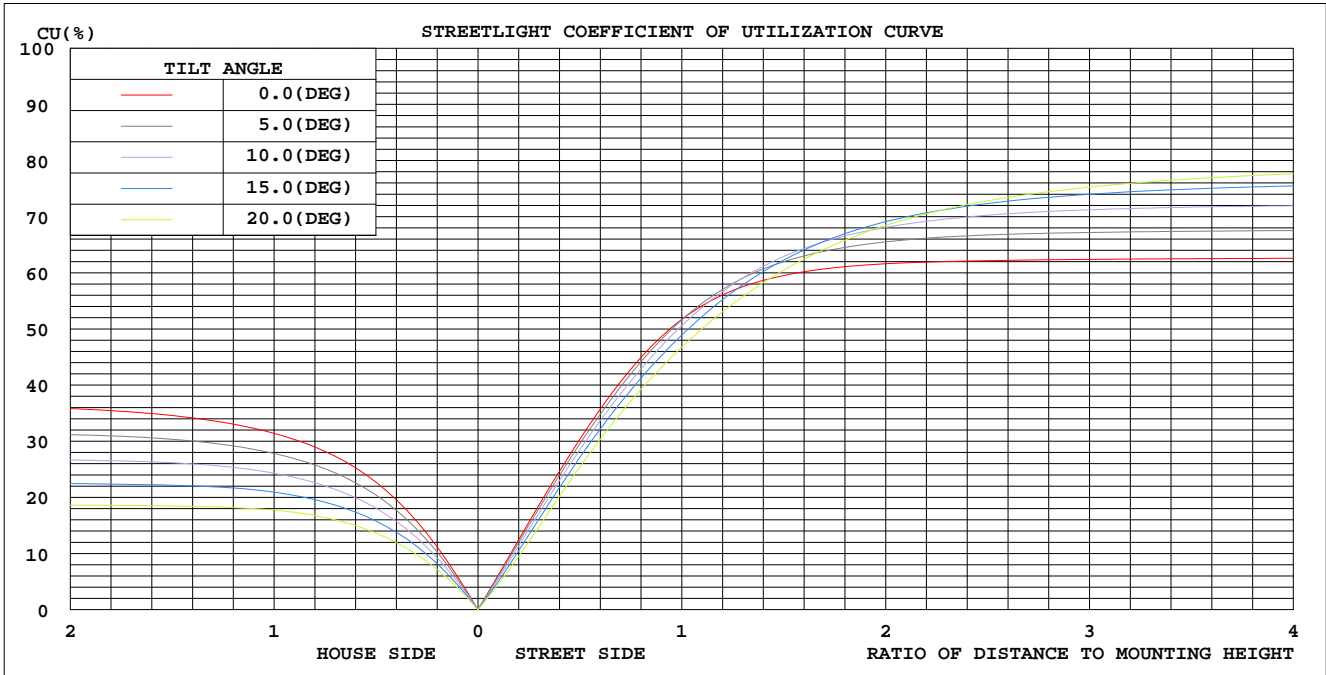

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature: 24.5DEG  
 Operators: William  
 Test Date: 2018-09-06

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 0.5DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
 Humidity: 65.7%  
 Test Distance: 26.000m [K=1.3825]  
 Remarks:

### ZONAL FLUX DIAGRAM

Test:U:9.5177V I:6.3243A P:60.194W PF:1.0000 Freq:0Hz Lamp Flux:8175.89x1 lm		
NAME:	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.:	SUR.:	Shielding Angle:N/A


$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	$\Phi$ lum,lamp
10	2308	2501	2628	2597	2458	2170	1975	2058	0- 10	222.4	222.4	2.72,2.72
20	2404	2705	2940	2845	2641	1958	1615	1811	10- 20	667.1	889.5	10.9,10.9
30	2545	2847	3237	3055	2828	1681	1252	1537	20- 30	1096	1985	24.3,24.3
40	2649	3082	3240	3250	2931	1392	947.9	1236	30- 40	1476	3461	42.3,42.3
50	2780	2930	2222	2992	3070	1098	720.0	964.2	40- 50	1713	5174	63.3,63.3
60	2853	1703	1010	1769	2925	790.5	507.8	713.7	50- 60	1608	6782	83,83
70	2044	396.7	211.7	347.8	1631	313.1	192.4	323.6	60- 70	1061	7843	95.9,95.9
80	117.1	69.46	84.93	70.31	80.68	68.69	48.50	85.64	70- 80	276.0	8119	99.3,99.3
90	2.871	2.265	1.173	1.536	2.228	2.608	2.100	2.820	80- 90	43.42	8162	99.8,99.8
100	0.5091	0.1454	0.0725	0.1091	1.746	0.4364	0.1454	0.4026	90-100	0.4685	8163	99.8,99.8
110	1.814	0.1454	0.0725	0.1777	3.491	2.075	1.088	1.857	100-110	0.9023	8163	99.8,99.8
120	2.546	0.2546	0.0725	0.1453	3.640	3.713	2.686	3.672	110-120	1.775	8165	99.9,99.9
130	3.855	1.345	0.5077	0.9074	3.487	3.745	3.699	4.180	120-130	2.159	8167	99.9,99.9
140	4.651	2.067	1.451	1.453	3.418	3.672	4.867	4.288	130-140	2.321	8170	99.9,99.9
150	5.019	3.668	2.535	2.652	3.782	4.658	5.730	4.905	140-150	2.320	8172	100,100
160	4.946	3.854	3.627	3.415	4.582	5.126	5.948	4.941	150-160	2.007	8174	100,100
170	5.520	4.799	4.638	3.997	4.947	5.564	6.020	5.049	160-170	1.335	8175	100,100
180	5.964	5.963	5.301	4.832	5.891	5.999	5.583	4.832	170-180	0.5056	8176	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2018-09-06

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 0.5DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3825]  
 Remarks:

### ISOCANDELA DIAGRAM


Test:U:9.5177V I:6.3243A P:60.194W PF:1.0000 Freq:0Hz Lamp Flux:8175.89x1 lm		
NAME:	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.:	SUR.:	Shielding Angle:N/A

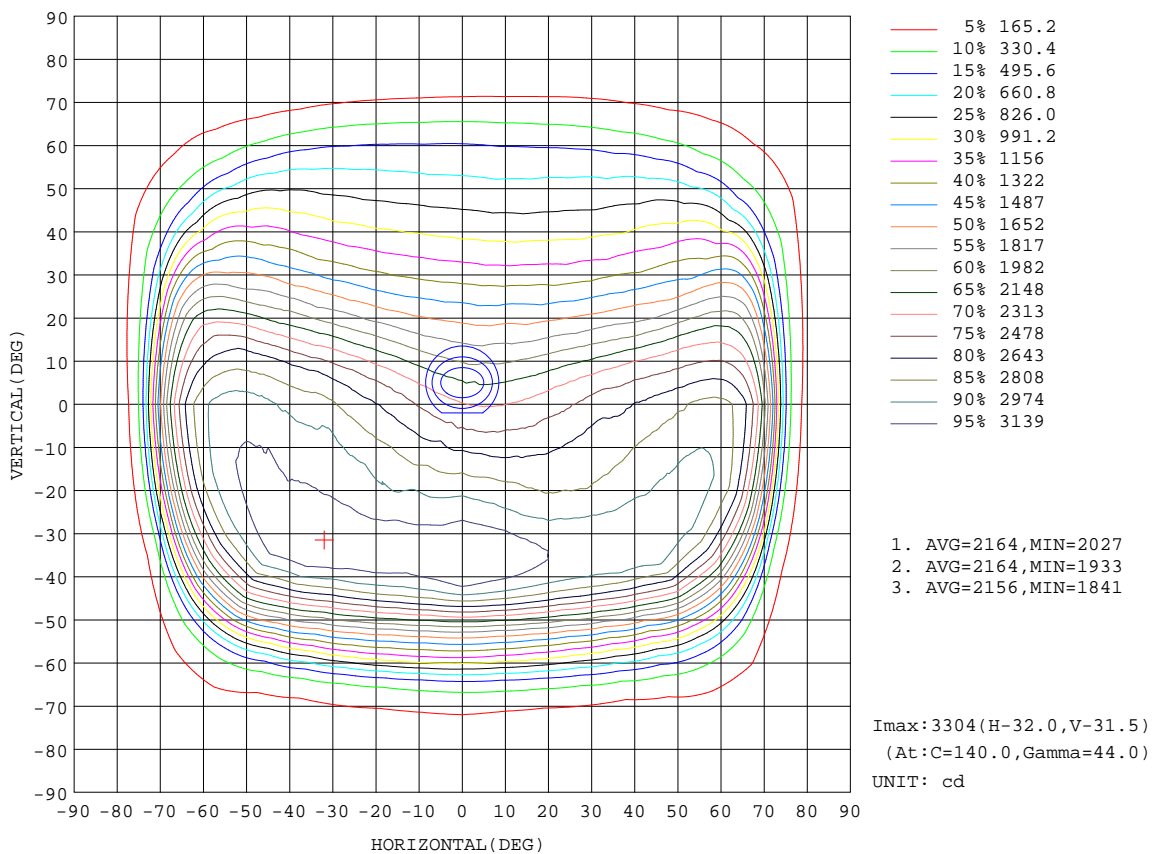

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature: 24.5DEG  
 Operators: William  
 Test Date: 2018-09-06

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
 Humidity: 65.7%  
 Test Distance: 26.000m [K=1.3825]  
 Remarks:

# Planar Illuminance Curve

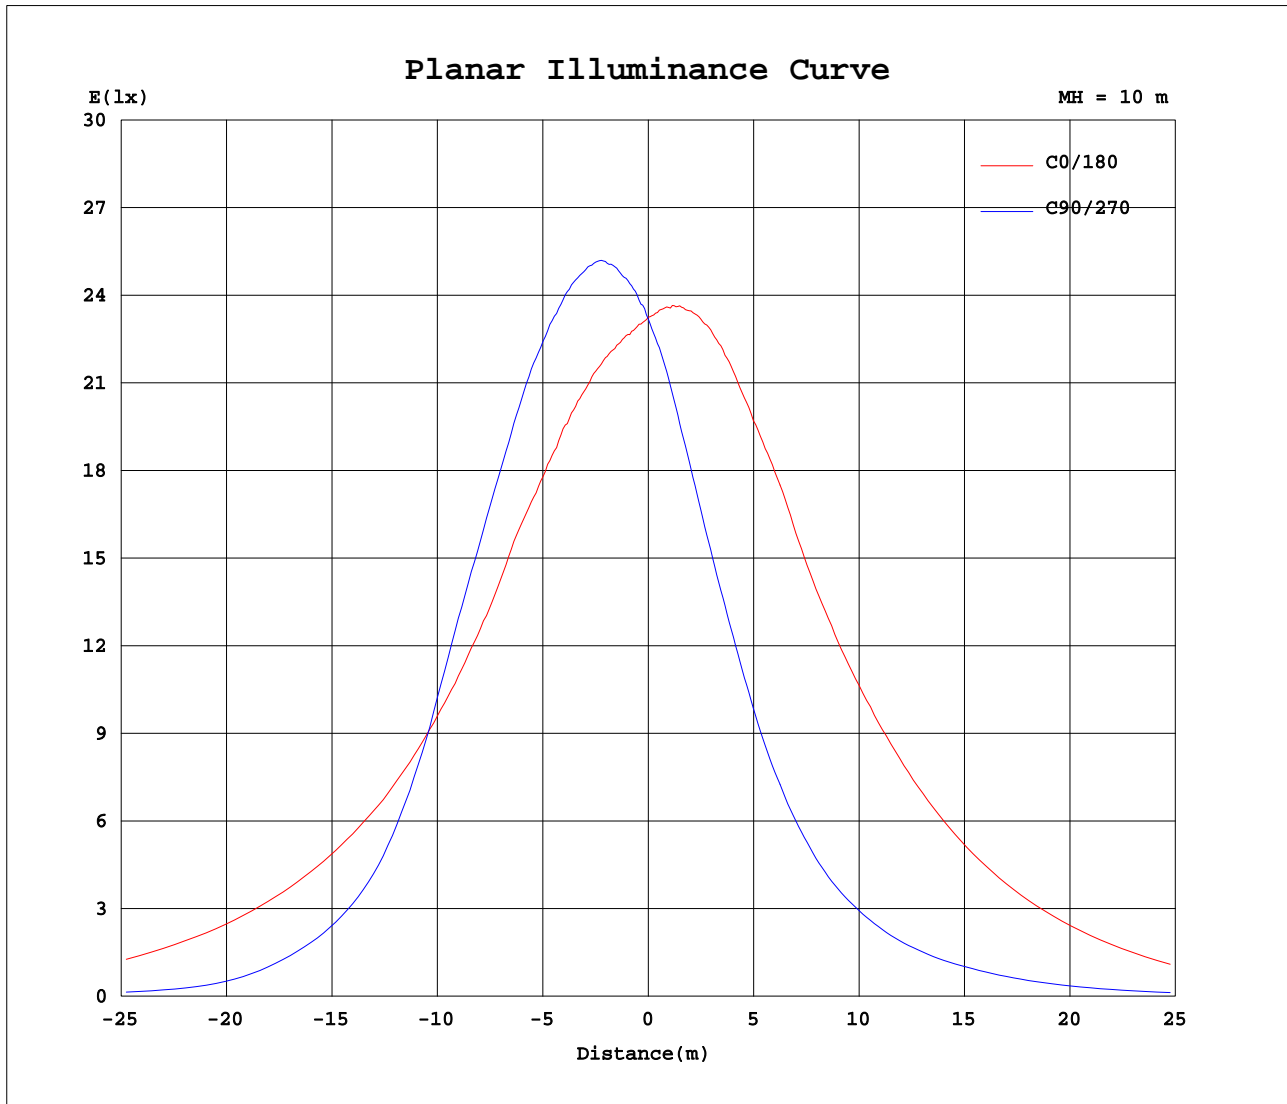


C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature: 24.5DEG  
Operators: William  
Test Date: 2018-09-06

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 0.5DEG  
Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
Humidity: 65.7%  
Test Distance: 26.000m [K=1.3825]  
Remarks:

### LCS REPORT

Test:U:9.5177V I:6.3243A P:60.194W PF:1.0000 Freq:0Hz Lamp Flux:8175.89x1 lm		
NAME:	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.:	SUR.:	Shielding Angle:N/A

#### LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

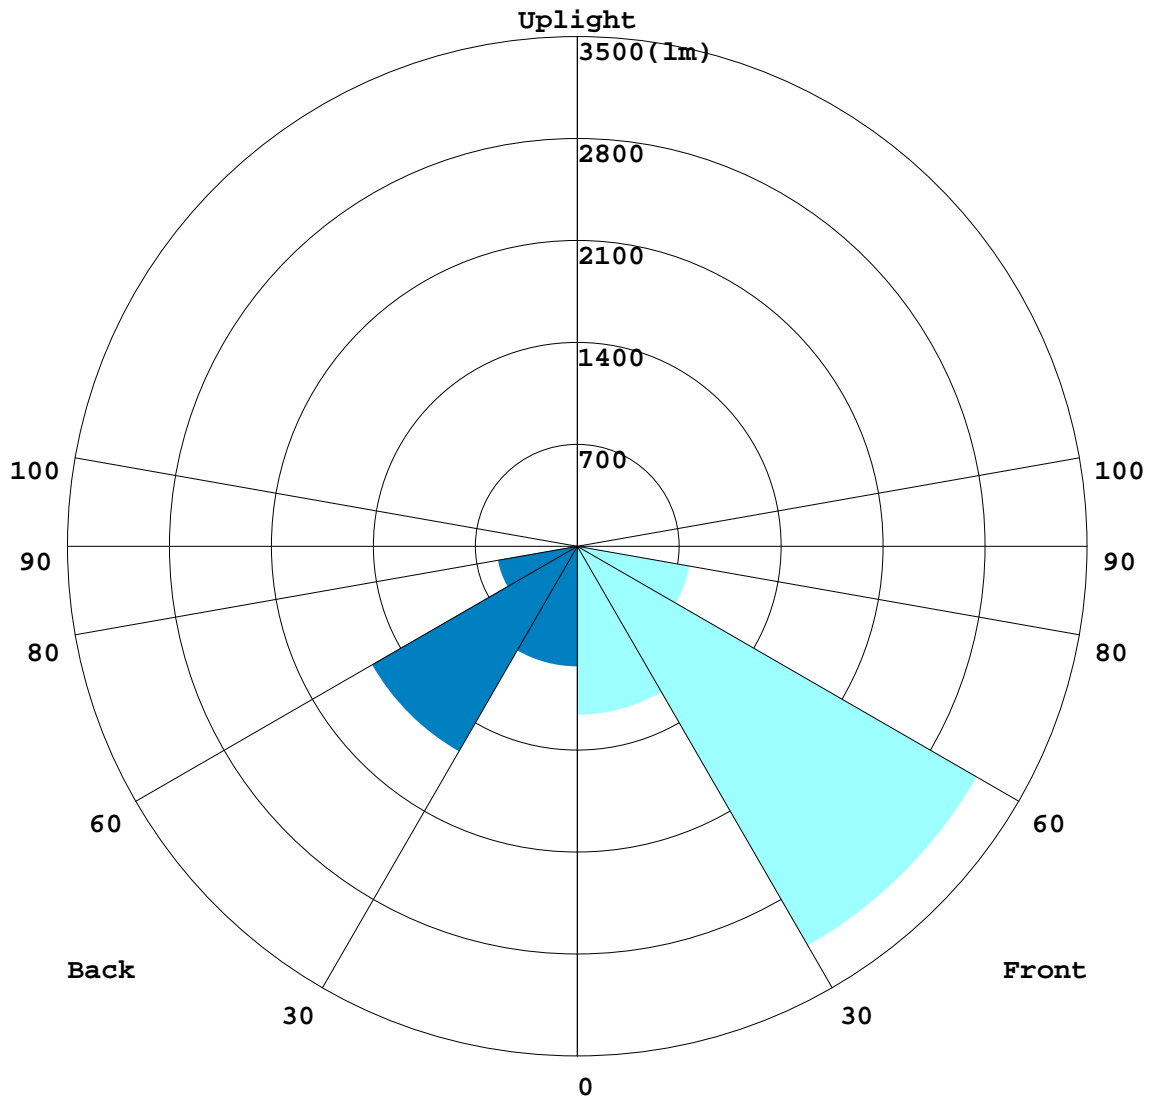

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2018-09-06

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3825]  
 Remarks:

## BUG REPORT

Test:U:9.5177V I:6.3243A P:60.194W PF:1.0000 Freq:0Hz Lamp Flux:8175.89x1 lm		
NAME:	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.:	SUR.:	Shielding Angle:N/A

### IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	1158.8	14.2
FM - Front-Medium(30-60)	3169.6	38.8
FH - Front-High(60-80)	783.6	9.6
FVH - Front-Very High(80-90)	23.249	0.3
<b>Total Forward Light</b>	<b>5139.7</b>	<b>62.9</b>

BL - Back-Low(0-30)	826.56	10.1
BM - Back-Medium(30-60)	1627.1	19.9
BH - Back-High(60-80)	553.03	6.8
BVH - Back-Very High(80-90)	20.174	0.2
<b>Total Back Light</b>	<b>3036.2</b>	<b>37.1</b>

UL - Uplight-Low(90-100)	0.4685	0.0
UH - Uplight-High(100-180)	13.324	0.2
<b>Total Up Light</b>	<b>13.793</b>	<b>0.2</b>

BUG(Back,Up,Glare) Rating	B2-U2-G1
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	3026.9	9.3126	3036.2
Street Side	5135.2	4.4803	5139.7

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2018-09-06


γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3825]  
 Remarks:



## ROAD ISOCANDELA REPORT

Test:U:9.5177V I:6.3243A P:60.194W PF:1.0000 Freq:0Hz Lamp Flux:8175.89x1 lm		
NAME:	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.:	SUR.:	Shielding Angle:N/A

### ROAD SURFACE ISOCANDELA DIAGRAM

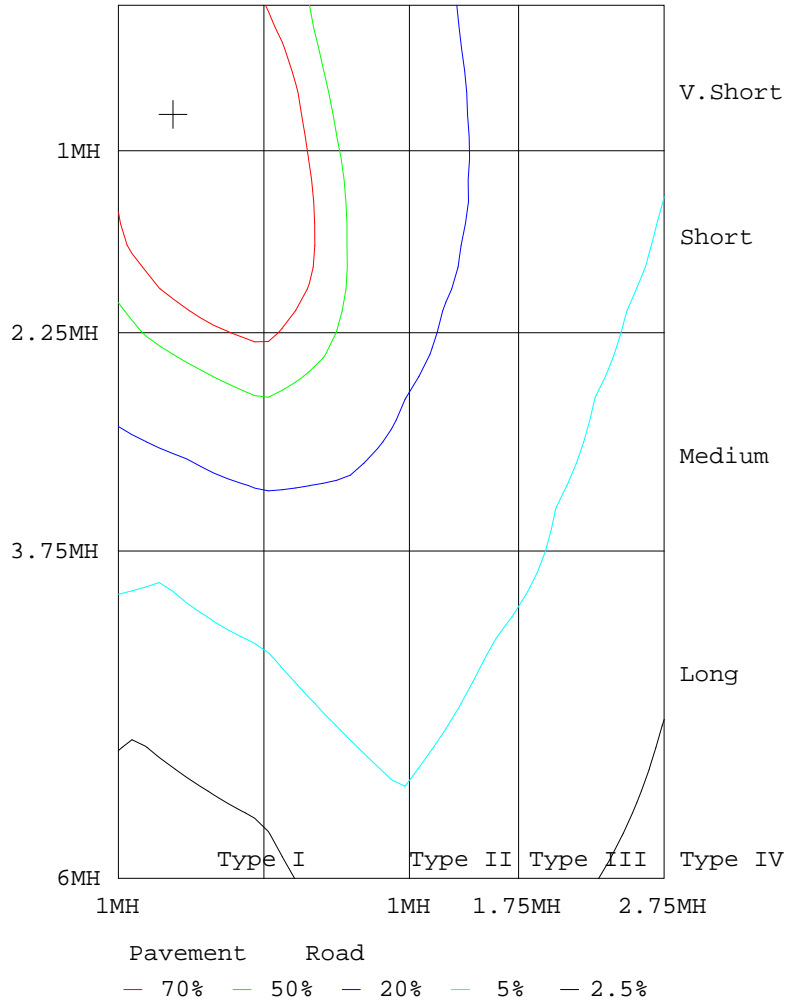

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2018-09-06

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3825]  
 Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:9.5177V I:6.3243A P:60.194W PF:1.0000 Freq:0Hz Lamp Flux:8175.89x1 lm		
NAME:	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.:	SUR.:	Shielding Angle:N/A

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
0	2322	2322	2322	2322	2322	2322	2322	2322	2322	2322	2322	2322	2322	2322	2322	2322	2322	2322	2322
5	2288	2318	2351	2371	2395	2412	2434	2445	2451	2472	2476	2475	2474	2463	2447	2442	2421	2398	2384
10	2308	2351	2402	2437	2483	2518	2556	2581	2605	2628	2630	2628	2637	2612	2582	2565	2543	2506	2458
15	2350	2413	2476	2528	2591	2622	2672	2719	2742	2782	2785	2770	2774	2746	2719	2698	2664	2619	2551
20	2404	2485	2543	2602	2678	2733	2795	2869	2912	2940	2947	2910	2904	2858	2832	2829	2779	2735	2641
25	2460	2547	2634	2688	2756	2814	2886	2969	3028	3095	3064	3028	2998	2957	2945	2942	2887	2824	2727
30	2545	2645	2706	2741	2812	2881	3004	3108	3188	3237	3205	3154	3107	3073	3036	3032	2999	2946	2828
35	2593	2704	2771	2814	2918	3013	3120	3206	3254	3285	3270	3230	3223	3177	3139	3095	3035	3002	2879
40	2649	2774	2858	2908	3047	3118	3147	3174	3205	3240	3199	3164	3211	3253	3247	3183	3121	3060	2931
45	2711	2861	2938	3049	3137	3093	2998	2918	2884	2897	2865	2907	3020	3164	3290	3266	3178	3124	3007
50	2780	2938	3025	3131	3057	2804	2544	2351	2235	2222	2239	2354	2557	2843	3142	3277	3199	3163	3070
55	2846	3012	3044	3059	2672	2208	1856	1643	1564	1566	1584	1679	1894	2237	2709	3093	3106	3113	3054
60	2853	2965	2888	2626	1944	1461	1202	1070	1002	1010	1036	1107	1260	1530	2008	2625	2825	2930	2925
65	2700	2682	2377	1772	1140	799	603	490	440	439	437	482	591	798	1185	1804	2179	2417	2554
70	2044	1784	1346	837	484	309	239	212	203	212	206	208	225	275	421	751	1100	1310	1631
75	515	364	393	275	173	128	112	115	123	131	130	122	115	129	156	235	279	224	339
80	117	76.2	139	109	77.3	61.6	65.3	92.5	95.5	84.9	101	101	72.8	64.7	75.9	103	113	59.6	80.7
85	34.0	25.9	43.1	34.0	26.3	20.7	46.6	83.4	57.9	34.4	59.6	94.4	64.3	27.3	27.8	31.8	38.8	22.2	23.5
90	2.87	5.16	6.46	5.31	2.59	1.94	5.95	2.75	2.45	1.17	2.49	2.55	4.53	1.10	1.97	3.45	5.30	4.73	2.23
95	0.44	0.51	0.51	0.30	0.22	0.15	0.07	0.07	0.00	0.07	0.07	0.07	0.07	0.07	0.15	0.22	0.29	0.51	0.80
100	0.51	0.44	0.51	0.29	0.15	0.15	0.00	0.07	0.00	0.07	0.07	0.07	0.07	0.07	0.15	0.22	0.29	0.51	1.75
105	1.38	1.31	0.51	0.29	0.15	0.15	0.00	0.07	0.00	0.07	0.07	0.07	0.07	0.07	0.15	0.22	0.29	1.17	2.84
110	1.81	1.60	1.17	0.36	0.15	0.15	0.00	0.07	0.00	0.07	0.07	0.07	0.15	0.21	0.15	0.22	1.01	1.39	3.49
115	2.47	1.89	1.31	0.51	0.15	0.15	0.00	0.07	0.07	0.07	0.07	0.07	0.15	0.15	0.15	0.51	1.31	1.89	3.71
120	2.55	2.55	1.39	1.23	0.36	0.15	0.00	0.07	0.07	0.07	0.15	0.14	0.15	0.15	0.15	0.88	1.39	2.42	3.64
125	3.57	2.69	2.33	1.31	1.16	0.50	0.28	0.14	0.21	0.22	0.15	0.14	0.15	0.22	0.44	1.24	1.75	2.56	3.56
130	3.85	3.72	2.48	1.89	1.31	1.38	0.58	0.65	0.36	0.51	0.36	0.43	0.44	0.58	1.23	1.32	2.48	3.08	3.49
135	3.93	3.79	2.84	2.40	1.61	1.38	1.16	1.30	1.23	1.30	1.08	1.15	1.08	1.23	1.38	1.61	2.48	3.08	3.42
140	4.65	4.23	3.65	3.12	2.33	1.80	1.67	1.52	1.37	1.45	1.45	1.38	1.38	1.38	1.53	2.48	2.99	3.59	3.42
145	4.87	4.67	4.09	3.63	2.91	2.47	2.45	2.39	2.24	2.32	1.67	1.95	2.10	2.40	2.54	2.48	3.72	3.88	3.42
150	5.02	4.67	4.67	3.99	3.78	3.56	3.04	2.68	2.52	2.54	2.39	2.32	2.39	2.61	2.69	2.78	3.80	3.88	3.78
155	4.95	4.67	4.75	4.07	3.79	3.63	3.55	3.54	3.39	3.41	3.11	2.75	2.83	3.12	3.20	3.36	3.80	3.88	4.22
160	4.95	4.67	4.75	4.36	3.93	3.77	3.62	3.69	3.54	3.63	3.55	3.62	3.49	3.41	3.42	3.80	3.80	3.88	4.58
165	5.02	4.88	4.75	4.65	4.36	4.06	3.98	3.98	3.83	3.92	3.84	3.69	3.70	3.56	3.63	3.73	4.01	4.46	4.58
170	5.52	5.39	5.18	4.94	4.81	4.79	4.85	4.70	4.68	4.64	4.57	4.27	4.21	3.92	4.07	4.31	4.53	4.76	4.95
175	5.96	5.98	5.91	5.74	5.83	5.81	5.50	5.27	5.05	5.08	5.07	4.78	4.78	4.64	4.65	4.96	5.04	5.05	5.82
180	5.96	6.05	5.99	6.10	5.97	5.95	5.72	5.21	5.62	5.30	5.08	5.07	4.94	4.65	5.02	5.18	5.04	5.05	5.89

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2018-09-06

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3825]  
 Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:9.5177V I:6.3243A P:60.194W PF:1.0000 Freq:0Hz Lamp Flux:8175.89x1 lm		
NAME:	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.:	SUR.:	Shielding Angle:N/A

Table--2

UNIT: cd

C (DEG) γ (DEG)	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350		
0	2322	2322	2322	2322	2322	2322	2322	2322	2322	2322	2322	2322	2322	2322	2322	2322	2322		
5	2353	2333	2294	2268	2237	2213	2191	2169	2167	2159	2167	2169	2177	2187	2214	2240	2268		
10	2409	2355	2275	2211	2129	2075	2027	1989	1975	1970	1974	2007	2043	2074	2142	2201	2253		
15	2475	2376	2250	2133	2012	1924	1856	1808	1788	1786	1800	1847	1906	1977	2084	2180	2269		
20	2542	2397	2211	2039	1877	1764	1677	1635	1615	1611	1631	1685	1757	1865	2010	2157	2297		
25	2593	2398	2140	1920	1738	1600	1511	1450	1435	1431	1461	1529	1611	1744	1931	2141	2330		
30	2638	2369	2041	1786	1576	1432	1332	1276	1252	1250	1282	1350	1458	1615	1830	2098	2359		
35	2684	2319	1940	1646	1427	1281	1180	1119	1094	1091	1115	1189	1294	1471	1721	2029	2380		
40	2678	2241	1801	1505	1280	1132	1035	975	948	948	973	1042	1148	1324	1593	1945	2390		
45	2695	2143	1686	1350	1134	991	902	851	831	826	851	905	1012	1178	1464	1841	2371		
50	2668	2021	1535	1208	988	864	785	742	720	718	742	796	884	1044	1315	1727	2344		
55	2591	1849	1375	1053	853	740	676	634	620	619	641	689	771	915	1176	1594	2305		
60	2415	1642	1160	877	704	610	549	515	508	503	525	574	645	782	1018	1436	2221		
65	2055	1295	865	641	510	431	381	354	349	352	372	416	479	598	807	1201	2021		
70	1299	745	473	348	278	232	207	194	192	199	216	244	288	359	492	790	1498		
75	430	300	200	149	126	119	116	112	113	119	128	138	153	178	235	337	540		
80	158	109	79.3	69.2	68.1	67.9	71.9	65.7	48.5	70.1	78.9	78.5	82.6	88.6	105	140	201		
85	48.8	35.7	24.5	26.0	18.8	27.3	34.1	24.7	23.3	25.3	38.1	31.3	19.4	33.7	35.4	52.4	70.7		
90	2.72	2.28	2.43	3.02	2.19	2.78	2.94	3.45	2.10	3.66	3.09	2.61	2.46	3.18	2.45	2.92	5.28		
95	0.73	0.51	0.36	0.15	0.08	0.07	0.07	0.00	0.00	0.00	0.00	0.07	0.15	0.15	0.37	0.51	0.58		
100	1.75	1.25	0.87	0.51	0.36	0.29	0.29	0.14	0.15	0.29	0.22	0.29	0.36	0.45	0.88	1.10	1.33		
105	2.77	2.48	1.97	1.24	0.87	0.51	0.43	0.58	0.58	0.44	0.51	0.72	0.87	1.24	1.83	2.20	2.57		
110	3.65	3.58	3.05	2.26	1.89	1.45	1.16	1.15	1.09	0.87	1.02	1.38	1.60	2.11	2.85	3.29	3.66		
115	4.23	4.31	4.00	3.29	2.76	2.25	1.96	1.81	1.81	1.81	1.81	2.11	2.47	3.20	3.87	4.24	4.54		
120	4.23	4.45	4.07	3.86	3.56	2.90	2.68	2.74	2.69	2.61	2.61	2.97	3.34	4.00	4.38	4.60	4.83		
125	4.08	4.16	4.07	3.72	3.77	3.26	2.97	3.32	3.26	2.97	2.82	3.41	3.70	4.22	4.38	4.60	4.69		
130	3.72	3.94	3.78	3.72	3.77	3.69	3.34	3.61	3.70	3.34	3.69	3.78	4.14	4.22	4.38	4.60	4.61		
135	3.65	3.65	3.78	3.64	3.77	4.13	4.19	4.40	4.72	4.21	4.42	4.07	4.21	4.22	4.38	4.60	4.61		
140	3.65	3.65	3.78	3.50	3.85	4.64	4.41	4.62	4.87	4.71	4.71	4.21	4.29	4.29	4.38	4.60	4.69		
145	3.72	3.80	3.86	3.93	4.35	5.00	4.85	4.98	5.44	5.00	5.22	4.65	4.65	4.44	4.60	4.75	4.76		
150	4.08	4.16	4.22	4.38	4.94	5.29	5.28	5.20	5.73	5.37	5.65	5.09	5.01	4.80	4.90	4.97	4.91		
155	4.37	4.53	4.72	5.03	5.22	5.21	5.28	5.62	5.95	5.87	5.65	5.45	5.01	4.73	4.97	5.11	5.12		
160	4.67	4.82	4.87	4.95	5.30	5.29	5.35	5.70	5.95	5.95	5.72	5.59	5.16	4.73	4.97	5.11	5.13		
165	4.67	4.89	4.87	4.96	5.30	5.36	5.50	5.77	5.95	6.02	5.79	5.81	5.45	4.73	4.97	5.11	5.13		
170	4.96	5.18	5.45	5.46	5.66	5.65	5.71	5.92	6.02	6.02	5.93	5.95	5.37	4.73	4.97	5.11	5.13		
175	5.76	5.77	5.83	5.97	5.95	6.01	5.71	5.77	5.88	5.95	5.57	5.30	5.08	4.73	4.97	5.11	5.13		
180	5.98	6.06	5.96	6.05	5.95	5.94	5.71	5.27	5.58	5.51	5.14	5.01	5.01	4.65	4.97	5.11	5.13		

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2018-09-06

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3825]  
 Remarks: