

PROJECT NAME:


\_CATALOG NUMBER:\_\_\_\_

NOTES:

\_FIXTURE SCHEDULE:

#### Page: 1 of 2

# PATH MAX<sup>TM</sup> LED BOLLARDS **CLASSIC SERIES**

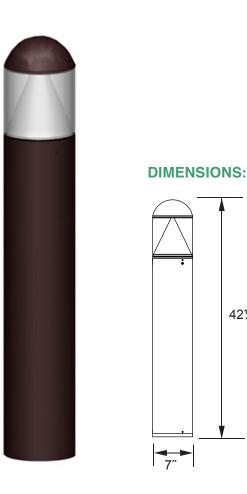



# **PRODUCT DESCRIPTION:**

The round Classic LED Bollard is an economical and energy efficient choice for lighting walkways, plazas and other pedestrian areas in commercial and residential applications. Constructed of durable aluminum for maximum weatherability, the bollard features a specialized cone reflector that projects light down and outward for ample illumination that enhances pedestrian safety and security.

## **FEATURES:**

- Up to 50,000 hour L70 lifetime, TM-21 standards @ 25°C
- **Dimming Driver Standard**
- . Sealed fixture is dirt and bug free
- CRI: > 80
- 5-year Limited Warranty

# **CONSTRUCTION:**

- Aluminum Housing
- Powder coated to be rust and corrosion proof .
- Internal Aluminum Cone Reflector .
- Clear Polycarbonate lens .

#### **MOUNTING:**

- Flush Mounting Base with Vandal Resistant Screws .
- Mounting Kit with 8" Anchor Bolts Included •

MODEL SELECTION			Typical order example: BL-CLRD17U-40B						
BL	-	CL	RD	17	U	-	40	В	
FAMILY	-	SUB FAMILY	SHAPE	WATTAGE	VOLTAGE	-	COLOR TEMPERATURE	FINISH	CONTROLS
BL= Bollards	-	CL= Classic Series	RD= Round	<b>17=</b> 17W	<b>U=</b> 120-277V	-	<b>40=</b> 4000K	<b>B=</b> Bronze	(OMIT)= None *EM= Battery Backup

\*Made-to-order items. Please contact your MaxLite representative for lead times and order quantities.



421/4"



# **SPECIFICATIONS:**

		BL-CLRD17				
ITEM	SPECIFICATION	DETAILS				
	Input Power (W)	17				
	Lumens Delivered (Im)	1355				
	Efficacy (Im/W)	79				
GENERAL PERFORMANCE	CRI	≥80				
	Lumen Maintenance (L70, TM-21 @ 25°C)	>50,000 hours				
	Color Temperature	4000K				
	Spacing Criteria	Available upon request				
ELECTRICAL	Input Voltage	120-277V standard				
PHYSICAL	Housing	Aluminum				
FITSICAL	Mounting	Flush mounting base; anchor bolts for mounting included				
	Certification	cCSAus, IP65				
CERTIFICATION	Environment	Outdoor, wet location				
CENTRICATION	Warranty	5 years				
	Operating Temperature	-40°F - 104°F (-40°C - 40°C)				

Lighting layouts and spacing criteria available upon request.

# **ORDERING:\***

ORDER CODE	MODEL	SHAPE	FINISH	VOLTAGE	WATTAGE	ССТ
107253	BL-CLRD17U-40B	Round	Bronze	120-277V	17W	4000K

\* Other finishes are available for order. Contact your MaxLite representative for quantities and lead times.

