

## FLAG POLE LIGHT: 3 x 270 LUMENS, TRIPLE HEAD, DUSK TILL DAWN



- This product uses ultra-bright LED's. Each light has 270 Lumens (Pack of 3 has a total of 810 LM).
- In the daytime the panel absorbs sunlight which charges the batteries. At night (with the switch on) light turns on automatically. Cycle repeats daily. Be sure that the power switch is ON.
- Charge the lights 8hrs minimum prior to first use. To charge, place solar lights with solar panel in direct sun
- This product is equipped with an internal rechargeable solar battery, making these lights very easy to use and simple to install.


### INCLUDES:

- LIGHT WITH SOLAR PANEL (3PCS)
- POLE ADAPTORS (2 PCS)
- 3-ARM ROUND MOUNT (1 PC)
- MOUNTING HARDWARE (3PCS)

DOES NOT INCLUDE POLE

## PRODUCT APPLICATIONS

Solar LED Lighting Flag Pole System is ideal for properly lighting flags. The lights can be adjusted to aim as desired, also great for lighting gardens and much more!

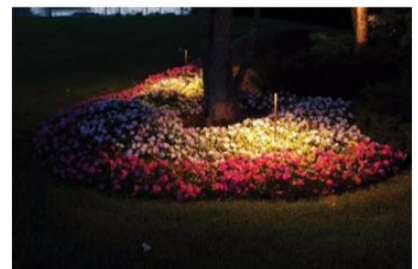

## PRODUCT SPECIFICATIONS

**TYPE:** 3 x 270 Flag Pole Light

**PRODUCT CODE:** C8FG28

**SOLAR CHARGING PANEL:** 5volt 420mAh solar panel

**BATTERIES:** 3 x 1.2volt 2000mAh Ni-MH

**LUMENS:**

- Per Light: 270 LM
- Total: 810 LM

**WORKING MODE:** Dusk till Dawn

**POLE SIZE:**

- Fits pole 4.125"-4.25" in diameter
- Works with tapered flag pole

**BATTERY LIFE:** 3-5 Years

**WORKING TIME:** Up to 12 hours when fully charged

**APPLICATIONS:** Flag Poles, Gardens and Flowerbeds

**WARRANTY:** 1 Year Full Warranty

## INSTALLATION NOTES

1. Place solar panel in best direction to receive the most light for the longest amount of time
2. Be sure to assemble your lighting system in a room temperature environment – This will assist you in not breaking any parts
3. Place light mount (male) in receiver (female) of 3-Arm Round Mount first, then attach light to mount
4. If using a Pole Adapter, you may have to cut it to fit as needed. Place Pole adapter directly on flagpole
5. Put 3-Arm Round Mount around the Pole Adapter (If used) and tighten both small screws
6. Your light mounts should be installed. Mount your lights, aim as desired.

Insert light mount first, then mount light.  
Do not force light mount into receiver using light, damage may occur.

**CORRECT**



**INCORRECT**



Light Mount

### Secure Light Head

**STEP #1**

Install light head into light mount



**STEP #2**

Insert a screw into the hole

